


# versatile™ 4C Mailbox, 4C16S-14

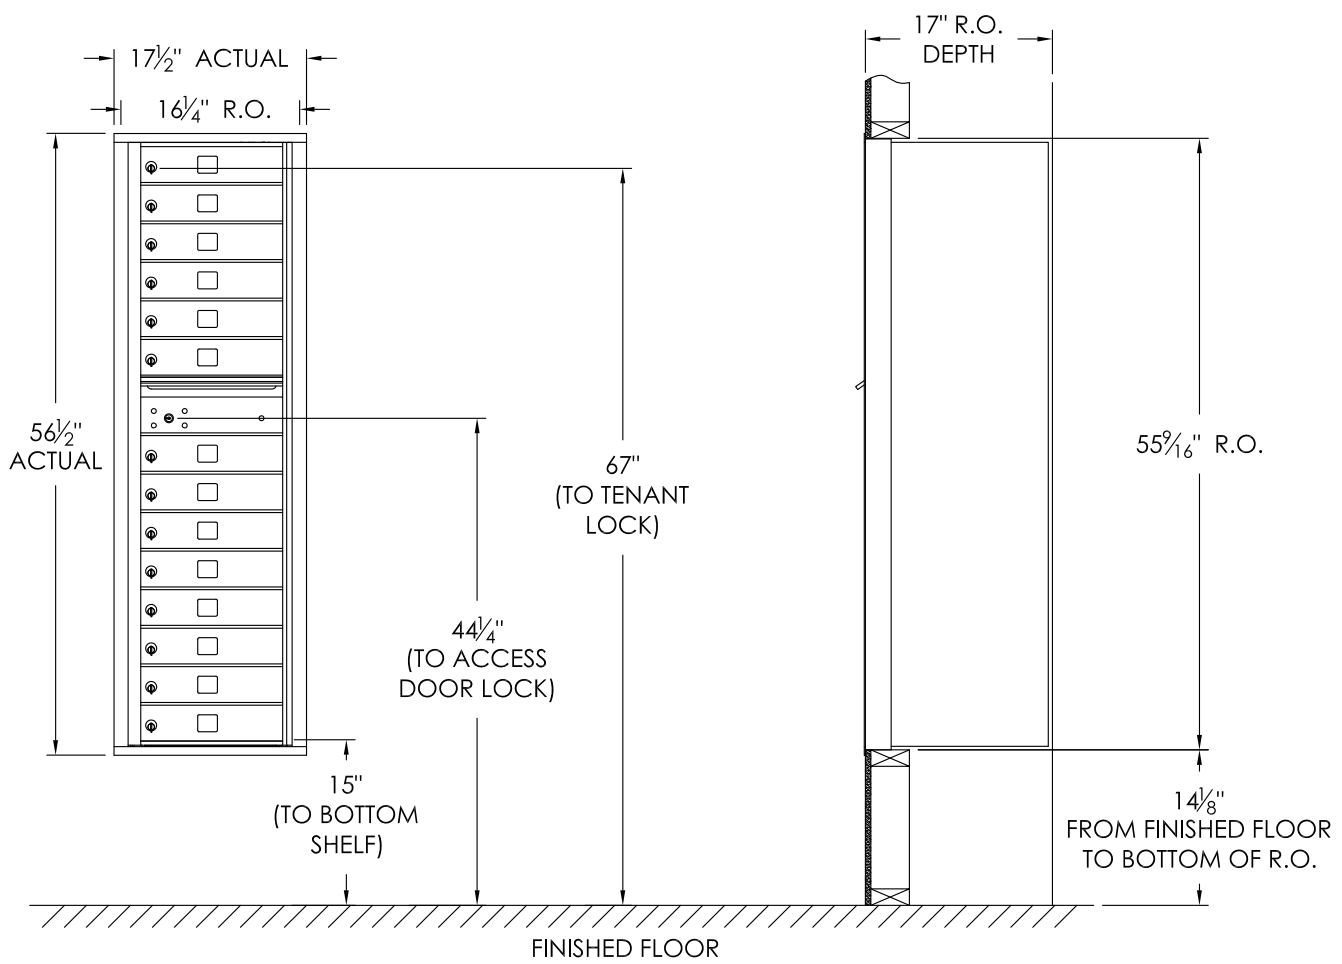

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	14
OUTGOING MAIL	OM1	3" H x 12" W x 15" D	1

- Notes:
1. This module does NOT meet USPS STD-4C installation specification requirements because there are customer compartments (interior bottom shelf) positioned less than 28" AFF.
  2. This 4C mailbox can be used for private applications.
  3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1/8".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

<p>5935 Corporate Drive • Manhattan, KS 66503 800.275.1747 • www.florencemailboxes.com</p>	MODEL 4C16S-14	REV D
	SCALE NONE	LAST REV DATE 01/04/2019
	DRAWING NUMBER 4C16S-14CS	DRAWN BY SDH